



USB and telecom tower extension lead



HIGH GLOSS USB

POWER

power and charge your USB devices with sockets protected against damaging surges and spikes

FEATURES

- Protects valuable electrical equipment from surges and spikes
- Telecom protection further prevents damage via broadband, ISDN or modem connections
- Unlimited value, 3 year connected equipment warranty
- Power switch to control the power to your devices
- Two USB ports (3.1A shared)
- LED power and surge indicators
- Space saving tower design
- Wall fixing option




PRODUCT IMAGES



SRGTOWSU8xPB

LINE DIAGRAMS

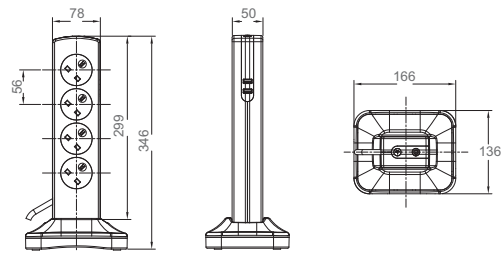

PRODUCT INFORMATION

Part Number	SRGTOWSU8xPB x = length of cable in metres
Product Dimensions	Height 346mm x Width 166mm x Depth 136mm
Sockets	8

TECHNICAL SPECIFICATIONS

Standard(s)	This product is certified to applicable British safety standards BS1363-2, BS62368
Maximum Load (Wattage)	13A: 3120 Watts, 240 Volts

IF IN DOUBT CONSULT A QUALIFIED ELECTRICIAN



SURGE TECHNICAL DATA

Protection	2*14MOV J+1 Gas tube
Maximum Surge Energy	370 Joules
Maximum Surge Current	12,000 Amps
Clamping Voltage	925 Volts
Response Time	<25nS
Thermal Cut Out	Yes
Protection	L-E, N-E, L-N
Surge Protection Indicator	Yes - White
Power Indicator	Yes - Blue

SAFETY WARNING

PLEASE READ CAREFULLY AND USE IN ACCORDANCE WITH OUR SAFETY INSTRUCTIONS BELOW

- | | | | |
|--|---|--|---|
| <input checked="" type="checkbox"/> DO | Uncoil cable before use | <input checked="" type="checkbox"/> DON'T | Allow heavy tools etc to hang unsupported on the cable or from the socket |
| <input checked="" type="checkbox"/> DO | Position the cable carefully to avoid accidents | <input checked="" type="checkbox"/> DON'T | Remove the plug and wire directly into a mains supply |
| <input checked="" type="checkbox"/> DON'T | Use in wet conditions | <input checked="" type="checkbox"/> DON'T | Exceed the total maximum load. |

Masterplug Help Line

03300 249 279

Supplied by

Luceco PLC

Stafford Park 1 Telford TF3 3BD ENGLAND

Visit our website at

www.masterplug.com