



# USB surge extension lead



# HIGH GLOSS USB

## POWER

power and charge your USB devices with sockets protected against damaging surges and spikes

### FEATURES

- Two USB ports (3.1A shared)
- Protects valuable electrical equipment from surges and spikes
- Unlimited value, 3 year connected equipment warranty
- Power switch to control the power to your devices
- LED power and surge indicators
- Wall fixing option



### PRODUCT IMAGES




SRGLSU4xPB



SRGLSU4xPW

### LINE DIAGRAMS

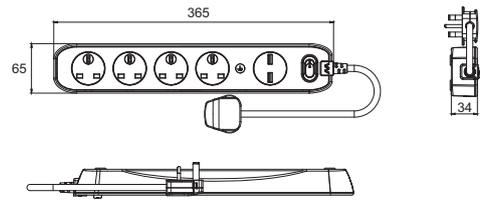

### PRODUCT INFORMATION

Part Number	SRGLSU4xPy
Part Number Note	x = length of cable in metres, y=colour
Product Dimensions	Height 34mm x Width 365mm x Depth 65mm
Sockets	4

### TECHNICAL SPECIFICATIONS

Standard(s)	This product is certified to applicable British safety standards BS1363-2, BS62368
Wall Mounting Option	Yes
Maximum Load (Wattage)	13A: 3120 Watts, 240 Volts
IF IN DOUBT CONSULT A QUALIFIED ELECTRICIAN	



### SURGE TECHNICAL DATA

Protection	2*14MOV J+1 Gas tube
Maximum Surge Energy	370 Joules
Maximum Surge Current	12,000 Amps
Clamping Voltage	925 Volts
Response Time	<25nS
Thermal Cut Out	Yes
Protection	L-N, L-E, N-E
Surge Protection Indicator	Yes - White
Power Indicator	Yes - Blue

### SAFETY WARNING

PLEASE READ CAREFULLY AND USE IN ACCORDANCE WITH OUR SAFETY INSTRUCTIONS BELOW

- |  |   |  |   |
|--|---|--|---|
| <input checked="" type="checkbox"/> <b>DO</b>    | Uncoil cable before use                         | <input checked="" type="checkbox"/> <b>DON'T</b> | Allow heavy tools etc to hang unsupported on the cable or from the socket |
| <input checked="" type="checkbox"/> <b>DO</b>    | Position the cable carefully to avoid accidents | <input checked="" type="checkbox"/> <b>DON'T</b> | Remove the plug and wire directly into a mains supply                     |
| <input checked="" type="checkbox"/> <b>DON'T</b> | Use in wet conditions                           | <input checked="" type="checkbox"/> <b>DON'T</b> | Exceed the total maximum load.  |