



USB back-to-back extension lead



HIGH GLOSS USB

POWER

power and charge your USB devices with sockets protected against damaging surges and spikes

FEATURES

- Two USB ports (3.1A shared)
- Protects valuable electrical equipment from surges and spikes
- Unlimited value, 3 year connected equipment warranty
- Power switch to control the power to your devices
- LED power and surge indicators
- Compact back-to-back design
- Wall fixing option



PRODUCT IMAGES




SRGDSU4xPB



SRGDSU4xPW

LINE DIAGRAMS

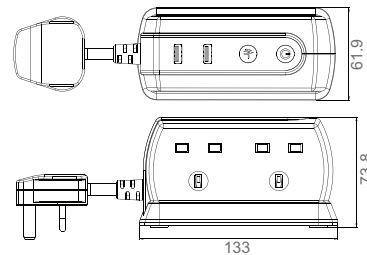

PRODUCT INFORMATION

Part Number	SRGDSU4xPy
Part Number Note	x = length of cable in metres, y=colour
Product Dimensions	Height 73.8mm x Width 133mm x Depth 61.9mm
Sockets	4

TECHNICAL SPECIFICATIONS

Standard(s)	This product is certified to applicable British safety standards BS1363-2, BS62368
Wall Mounting Option	Yes
Maximum Load (Wattage)	13A: 3120 Watts, 240 Volts



IF IN DOUBT CONSULT A QUALIFIED ELECTRICIAN

SURGE TECHNICAL DATA

Protection	3 x 14 MOV + 1 x GDT
Maximum Surge Energy	375 Joules
Maximum Surge Current	13500 Amps
Clamping Voltage	775 Volts
Response Time	< 10nS
Thermal Cut Out	Yes
Protection	L-N, L-E, N-E
Surge Protection Indicator	Yes - White
Power Indicator	Yes - Blue

SAFETY WARNING

PLEASE READ CAREFULLY AND USE IN ACCORDANCE WITH OUR SAFETY INSTRUCTIONS BELOW

- | | |
|---|--|
| <input checked="" type="checkbox"/> DO Uncoil cable before use | <input checked="" type="checkbox"/> DON'T Allow heavy tools etc to hang unsupported on the cable or from the socket |
| <input checked="" type="checkbox"/> DO Position the cable carefully to avoid accidents | <input checked="" type="checkbox"/> DON'T Remove the plug and wire directly into a mains supply |
| <input checked="" type="checkbox"/> DON'T Use in wet conditions | <input checked="" type="checkbox"/> DON'T Exceed the total maximum load. |

Masterplug Help Line
03300 249 279

Supplied by
Luceco PLC
Stafford Park 1 Telford TF3 3BD ENGLAND

Visit our website at
www.masterplug.com