



UK to USA/AUS/Asia adaptor with USB



TRAVEL

POWER

charge and power your portable devices wherever you go with our worldwide travel range

FEATURES

- Convert UK plugs for use with American sockets
- Two USB ports (2.1A shared) for charging portable devices
- Ideal for use when travelling in the US, Australia and Asia




PRODUCT IMAGES



TAUSBUSA2

LINE DRAWING

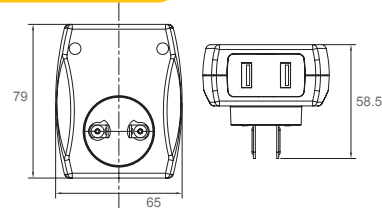

PRODUCT INFORMATION

Part Number	TAUSBUSA2
Product Dimensions	Height 79mm x Width 65mm x Depth 58.5mm
Sockets	1


TECHNICAL SPECIFICATIONS

Standard(s)	This product is certified to applicable British safety standards BS5733
Maximum Load (Wattage)	7.5A: 1800 Watts, 240 Volts



IF IN DOUBT CONSULT A QUALIFIED ELECTRICIAN

COUNTRIES OF USE

AMERICA/AUSTRALIA This adaptor has been designed with adjustable pins to enable the adaptor to be used either the American 110V or Australian 240V systems. Use only with non earthed (2 pin wire ) appliances rated up to 1,500 watts.

AMERICAN - Pin Position A (as below) Countries of use: U.S.A, Canada, Japan, Caribbean Islands and other countries operating a 110V U.S.A. system. This adaptor may also be used as a shaver adaptor in the above countries.

The American/Australian adaptor must only be used with non earthed appliances (i.e. with a 2 pin wire mains lead).

AUSTRALIAN - Pin Position B (as below) Countries of use: Australia, New Zealand and the Pacific Islands operating the 240V Australian system. This adaptor may also be used as a shaver adaptor in the above countries. The American/Australian adaptor must only be used with non earthed appliances (i.e. with a 2 pin wire mains lead).

Pin Position A

Pin Position B



DUAL USB POWER OUTPUT

This product is fitted with two type A USB outlets that allow you to simultaneously charge and use two devices. Ideal for charging portable devices. Two type A USB ports - 5V 2100mA output. (Shared across both ports).

SAFETY WARNING

- ✓ DO Ensure that the appliance is suitable for the local power supply.
- ✓ DO Check whether your appliance is suitable for dual voltage, most travel appliances are designed to run on dual voltages. This adaptor does not change voltages.
- ✓ DO Insert the adaptor into the wall socket and use the appliance in the normal way.
- ✓ DO Select the correct adaptor combination for the required country.
- ✗ DON'T Use if the local socket fitting does not allow insertion of the adaptor. This may be the case in some countries.
- ✗ DON'T Exceed maximum allowable load 7.5 Amps, 240 Volts a.c., 1800 Watts..
- ✗ DON'T Use in damp or wet conditions.

Masterplug Help Line

03300 249 279

Supplied by

Luceco PLC

Stafford Park 1 Telford TF3 3BD ENGLAND

Visit our website at

www.masterplug.com